

SRP-330II

3인치 POS용
영수증 프린터



유통



관광, 외식



티케팅



게임




은행



키오스크

Durable and Cost-Efficient

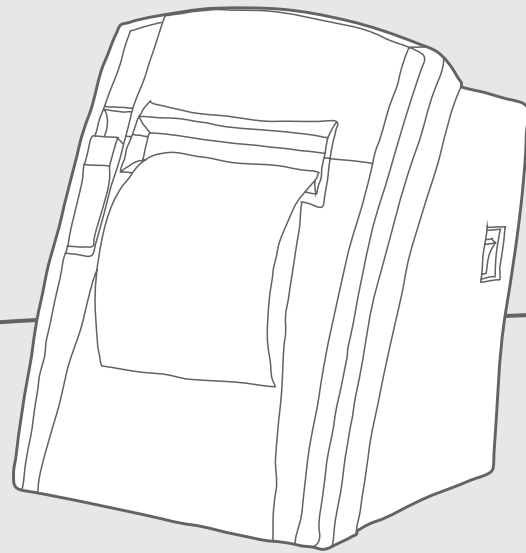

효율적인 비용 관리

- All in one Plus™ Interface 지원
- Triple Interface : USB V2.0 FS + Ethernet + Serial
- Dual Interface : USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + SD
- 용지절감 기능지원: 영수증 발행길이 최고 25% 축소가능
- SD 타입 키친벨 기본장착 (4종)

220
mm/secTPH
150km

믿을 수 있는 프린팅 성능

- 최고 220 mm/sec 인쇄 속도
- 최고의 신뢰성 보증 : 150km의 TPH & 150만 컷의 오토커터
- 203 dpi 지원



사용자 중심의 디자인

- 벽걸이 형으로 공간 절약 가능
- 2인치, 3인치 용지 선택
- 기본악세사리로 2인치 파티션 제공
- 용지 걸림 방지 가이드 (Anti-jam)
- Easy Tracking™: 프린터 하단부에 위치한 QR코드로 기술 지원 관련 영상 및 정보 제공



SRP-330II

3인치 POS용
영수증 프린터

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 220 mm/sec

Print Resolution

SRP-330II: 180 dpi

SRP-332II: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm, 58 mm (with 2 inch Partition)

Media Roll Diameter

Up to 80 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x L x D)

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

Weight

1.37 kg (3.02 lbs.)

Power

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

Memory

64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Serial

③ USB V2.0 FS + Parallel

④ USB V2.0 FS + SD

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

150 km

Auto Cutter

1.5 Million Cuts

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,
Linux CUPS Driver, Mac Driver,
Virtual COM USB/Ethernet Driver, Utility Program

SDK

iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-330II: - Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Coda Bar, Code39, Code93, Code128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Optional

USB A-B Cable, External buzzer, B-Melodist,
2 inch partition



BR-SRP-330II-KR-MAR17-V1-NF

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com

